


# Product Information

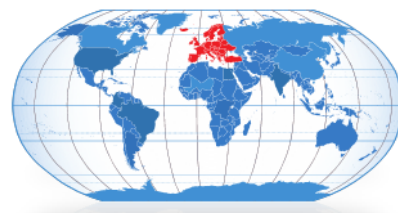

## SCA5PN

### SCA Series Scaffolding Castor

Pressed Steel Zinc Plated construction with double ball race swivel head.


Solid plug stem fitting nominal 1 1/2" diameter for use in scaffold tubing. Castors are retained by a single spring plunger, allowing simple and quick castor fitting and removal.

Grey Nylon wheel centre with a red polyurethane tyre, and a plain bearing.

The castor incorporates a wheel brake device that secures the wheel from rotation independently of load applied, thus ensuring the wheel is locked when the tower is unladen. The locking action moves the wheel to a non-offset position, bringing the wheel axle directly in line with the centre of the castor.

### Technical Data

Wheel diameter	125mm
Wheel tread width	35mm
Swivel radius	97.5mm
Body - colour	Zinc Plated
Wheel — colour	Grey/Red
Load capacity (dynamic)	600kg
Standards:-	DIN4422-HD1004:8/92 BS1139 Part 3 1994 HD1004:1992

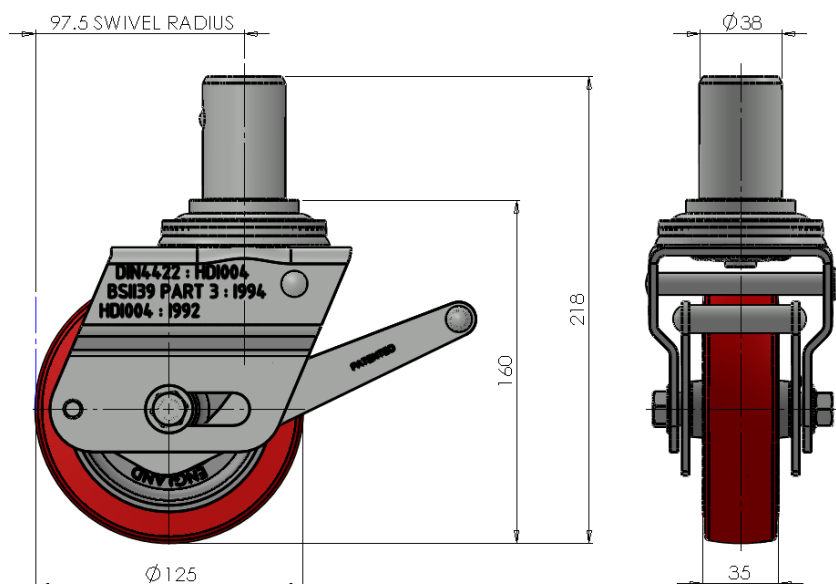

THE GLOBAL LEADER IN CASTORS AND WHEELS

Printed copies are uncontrolled, please refer to website for latest information [www.colson-castors.co.uk](http://www.colson-castors.co.uk)

20/04/2015 Issue 1